

BEST AVAILABLE COPY

1261989

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS, SHALL COME;

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

December 15, 2004


THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE.

APPLICATION NUMBER: 60/517,352

FILING DATE: *November 04, 2003*

RELATED PCT APPLICATION NUMBER: *PCT/US04/37148*

Certified by



Jon W Dudas

Acting Under Secretary of Commerce
for Intellectual Property
and Acting Director of the U.S.
Patent and Trademark Office





02570 U.S. PTO

Please type a plus sign (+) inside this box → ☐

Approved for use through 10/31/2002. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

PTO/SB/16 (8-00)

PROVISIONAL APPLICATION FOR PATENT COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53(c).

15757 U.S. PTO
60/517352



11/04/03

INVENTOR(S)					
Given Name (first and middle (if any))		Family Name or Surname		Residence (City and either State or Foreign Country)	
Giora		ERLICH		1 Vale Place North Caldwell, NJ 07006	
<input checked="" type="checkbox"/> Additional inventors are being named on the <u>1</u> separately numbered sheets attached hereto.					
TITLE OF THE INVENTION (280 characters max)					
DIRECTIONAL CONTROL FOR DUAL BRUSH ROBOTIC POOL CLEANERS					
Direct all correspondence to: CORRESPONDENCE ADDRESS					
<input type="checkbox"/> Customer Number		<input type="text"/>		<input type="text"/>	
OR		Type Customer Number here			
<input checked="" type="checkbox"/> Firm or Individual Name		ABELMAN, FRAYNE & SCHWAB Attorneys at Law			
Address		150 East 42 nd Street			
Address		New York, New York 10017			
City		State		Zip	
Country		U.S.A.	Telephone	(212) 949-9022	Fax (212) 949-9190
ENCLOSED APPLICATION PARTS (check all that apply)					
<input checked="" type="checkbox"/> Specification (includes drawings) Number of Pages		22		<input type="checkbox"/> CD(s), Number <input type="text"/>	
<input checked="" type="checkbox"/> Drawing(s) Number of sheets		7		<input type="checkbox"/> Other (specify) <input type="text"/>	
<input type="checkbox"/> Application Data Sheet. See 37 CFR 1.76					
METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT (check one)					
<input checked="" type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27.				FILING FEE AMOUNT (\$)	
<input checked="" type="checkbox"/> A check or money order is enclosed to cover the filing fees					
<input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number:		01-0035		\$80.00	
<input type="checkbox"/> Payment by credit card. Form PTO-2038 is attached.					
The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.					
<input checked="" type="checkbox"/> No.					
<input type="checkbox"/> Yes, the name of the U.S. Government agency and the Government contract number are: _____					

Respectfully submitted,

SIGNATURE _____

TYPED or PRINTED NAME Thomas E. Spath

TELEPHONE (212) 949-9022

Date November 4, 2003

REGISTRATION NO. 25,928
(if appropriate)

Docket Number: 206,273

USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

This collection of information is required by 37 CFR 1.51. The information is used by the public to file (and by the PTO to process) a provisional application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the complete provisional application to the PTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Mail Stop Provisional Application, Assistant Commissioner for Patents Alexandria, VA 22313-1450.

PROVISIONAL APPLICATION COVER SHEET
Additional Page

PTO/SB/16 (8-00)

Approved for use through 10/31/2002. OMB 0651- 0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Docket Number	206,273	Type a plus sign (+) inside this box →	+
INVENTOR(S) APPLICANT(S)			
Given Name (first and middle (if any))	Family or Surname	Residence (City and either State or Foreign Country)	
Tibor	HORVATH	6 Hemlock Terrace Springfield NJ 07081	

DIRECTIONAL CONTROL FOR DUAL BRUSH ROBOTIC POOL CLEANERS

Field of the Invention

This invention relates to the directional control of self-propelled automated pool and tank cleaners that are supported by moving brushes positioned at opposing ends of the cleaner housing.

5 Background of the Invention

A wide variety of methods and apparatus for controlling the patterns of movement of tank and swimming pool cleaners have been disclosed in the prior art. The overriding purpose of these controls is to assure that the cleaner passes over substantially the entire surface to be cleaned during the time allotted for cleaning.

10 In the case of tanks and above-ground swimming pools, the robotic cleaner generally makes contact only with the bottom surface of the tank or pool. In the case of in-ground swimming pools, the pool cleaner is designed to climb the side walls, typically to the water line, and then reverse the direction of movement to descend the side wall and resume a cleaning path across the bottom surface of the pool. In some
15 wall cleaning units, the pool cleaner actually moves along the wall as part of its predetermined patterned movement so that its descent is along a different path. In many cases, the pattern of movement is random and the pool cleaner must be operated for many hours, and even then with no real assurance that some surfaces will not be omitted.

Pool cleaners of the prior art include those that are supported by endless tracks or belts that are driven by a pair of motors or a single motor; and those that are supported on generally cylindrical cleaning brushes that in turn are driven by a system of sprockets and pulleys. The moving brushes can be made from a ribbed solid
5 polymer web that is formed into a cylindrical supporting surface or, alternatively, from a foamed polymer material that is either smooth or highly textured and resilient.

In order to control the patterned movement of the pool cleaner, it has been the practice in the art to provide a programmed processor used in conjunction with a controller to stop, start and/or reverse the direction of the driving motor or motors.
10 It is also known in the art to control the orientation of the pool cleaner on the surface to be cleaned by interrupting the power to the pump motor and impeller to create a torsional force sufficient to turn the entire pool cleaner body. In other cases, the processor is provided with a complex algorithm which is designed to move the pool cleaner for a predetermined period of time before changing direction or, in other
15 cases to cause it to move randomly across the surfaces to be cleaned with the expectation that, given sufficient time, the pool cleaner will in fact cover all submerged surfaces to be cleaner. Device have also been disclosed that include sensor for detecting a side wall or other obstruction for the purpose of generating a signal that is sent to the sensor to cause some change in the operating program of the
20 cleaner.

As will be understood by one of ordinary skill in the art, the cost associated with the design and assembly of a pool cleaner having more than one drive motor is significant. When this is combined with the expense associated with the design and

fabrication of integrated circuit devices and processors embodying complex programs and algorithms and the associated controllers, it will be apparent that, additional substantial expenses will be incurred. Moreover, the mechanical linkages associated with the dual drive motors are sources of wear and potential failure.

5 It is therefore an object of this invention to provide a relatively simpler and less expensive apparatus and method for controlling the direction of movement of a tank and pool cleaner that requires only one drive motor.

 It is a further object of the invention to provide a pool cleaner directional control apparatus and method that will function in tank and pool cleaners adapted to
10 cleaning only the bottom surface, but that will also ascend the side walls of a pool, while at the same time establishing a regular and regulated pattern of movement that will assure cleaning contact with all surfaces in a relatively short period of time.

 A further object of the invention is to provide a directional control system for a pool cleaner that utilizes a relatively simple processor program, including one that
15 can be adjusted for customized for use with a given style and/or size of pool.

Summary of the Invention

 The above objects and further advantages are achieved with the method and apparatus of the invention in which the pool cleaner body is supported on a pair of co-axially mounted but separate brushes positioned at opposing ends of the pool
20 cleaner housing, one of each of the pair of brushes being driven by a common drive means, e.g., a belt. The driven brushes will alternately assume a leading and trailing position, depending upon the direction of movement of the cleaner. Each of the

driven brushes are operably connected to the adjacent free brush by a rotational delay clutch means, where both brushes are preferably mounted for axial rotation on a common axle.

5 The direction of rotation of the drive motor, and thereby the direction of movement of the pool cleaner, is determined by the programmed processor and associated controller. When the direction of the drive motor is changed, the rotational delay clutch disengages the driven brush from the free brush for a predetermined amount of arcuate movement or rotation by the driven brush. This has the effect of causing a turning or pivoting movement around the stationery free
10 brushes.

After the predetermined degree of rotational movement by the leading and trailing brushes, the clutch engages the adjacent leading and aft free brushes so that both pairs of brushes at either end of the unit are moving synchronously and the cleaner advances in a straight line.

15 The method and apparatus of the invention broadly contemplates utilizing the differential rotational movement of one-side of a pair of supporting brushes respectively positioned at the fore and aft ends of the pool cleaner to effect a turning or pivotal movement of the pool cleaner and then engaging the adjacent free brush whereby the differential rotational movement is eliminated and the adjacent driven and
20 free brushes rotate at the same angular rate. It will be understood that the differential angular rotational movement of the driven and free adjacent brushes can be achieved by entirely interrupting the rotation of the free brush, but that a differential rotational speed can also be effected with a lower rate of rotation of the free brush to achieve

substantially the same result, i.e., the turning of the pool cleaner to move in a different angular direction.

As will be understood by one of ordinary skill in the art, the degree of the change in the direction of the pool cleaner path after each leg will be determined by a number of factors. These include the width of the pool cleaner; the diameter/circumference of the contact surfaces of the brushes; the number of full and/or partial revolutions made by the driven brush before the free brush assumes a synchronous speed of rotational movement; the frictional force effects between the contact surface of the brushes as determined by the pool surface, e.g., glazed tile versus textured concrete; and the nature of the brushes, e.g., molded polyvinyl chloride, expanded polymeric foam having a smooth surface and polymeric foam with a resilient textured surface. For example, a pool cleaner having brushes with a three-inch diameter will have a circumference of about nine and one-half inches. A full turn of the fore and aft brushes will theoretically move one end of the pool cleaner a distance somewhat less than nine inches from its starting point. Frictional forces, inertia and the overall movement of the pool cleaner will reduce the actual distance somewhat. As will be apparent to one of ordinary skill in the art, the configuration of the pool cleaner, including particularly the size of the brushes, and its relative width, as well as the conditions in the pool or tank in which the machine is to be operated must be taken into account in applying the method and apparatus of the invention.

In one preferred embodiment, a first clutch member is secured to the interior end of each of the driven brushes and the opposing surface of the free brush; a

projecting pin or other engagement member extends from the driven clutch plate towards the opposing interior surface of the second plate which is provided with a groove for receiving the projecting pin in rotationally sliding relation, the groove in the free clutch plate also including a stationary engagement member. When the driven clutch plate is caused to rotate, its projecting pin will rotate in the groove until it reaches the projecting engagement member in the free brush clutch plate, after which the two will move synchronously. When the direction of rotation of the driven brush is reversed, the projecting pin in the driven plate will move approximately one full rotation in the groove until it reaches the engagement member in the free plate. As will be understood from the description of this embodiment, with each change in direction, the free brush remains stationary while the driven brush moves through approximately one full rotation before the clutch members are fully engaged and synchronous rotation is resumed.

In a modification of this embodiment, an intermediate clutch plate that is grooved on one side and includes projecting engagement members on its opposing surfaces is inserted between the driven and the free clutch plate faces. When the direction of rotation of the drive motor is reversed, the projecting pin on the face of the driven clutch plate moves approximately one full rotation before engaging the corresponding pin in the adjacent intermediate plate, thereby causing it to also rotate. The projecting pin on the opposing side of the intermediate plate continues to rotate in a corresponding groove in the free clutch plate, but without moving the free plate until it reaches the engagement member. This arrangement provides for almost two

complete rotations by the driven brush before the free brush begins to move synchronously.

In a further modification of this embodiment, the opposing sides of the intermediate clutch plate are both provided with a groove and an engagement member. In this embodiment, an additional nearly complete rotation is completed before the free brush clutch plate is engaged and causes the synchronous turning of the free brush to which it is attached.

In a further modification of this embodiment, a plurality of intermediate clutch plates, constructed in accordance with the description of the single grooved intermediate clutch plate or the double grooved intermediate clutch plate of the previous embodiments, are inserted on a common axis of rotation with the opposing clutch plates mounted on the free and driven brushes. As will be understood from the prior descriptions, each intermediate clutch plate can provide one or two almost complete further rotations.

It will also be apparent that the width of the respective projecting pins and of the engagement members will reduce the angular rotation from 360° . The amount of this reduction can be minimized by minimizing the size of the projecting and engagement members, i.e., by using a relatively narrow strip of corrosion-resistant metal, e.g., stainless steel; or by molding or machining the grooves to leave a relatively narrow web of material in each of the opposing faces.

In a further preferred embodiment of a delay clutch mechanism in accordance with the method and apparatus of the invention, the opposite ends of a length of flexible wire or similar material is attached to the opposing faces of the driven and

free brushes. As the driven brush rotates in one direction, the wire is wrapped around the axle on which the brushes are mounted until all slack has been taken up, at which point the free brush begins to rotate synchronously. When the direction of rotation of the drive motor is reversed, the corresponding change in direction of rotation of the driven brush causes slack to form in the wire as it is unwrapped from the axle in the first direction and this effect continues until the driven brush has rotated sufficiently to again take up the slack around the axle, at which point the free brush begins to move synchronously with the drive brush.

In this embodiment, the extent of the angular rotation of the driven brush before the free brush begins to move is the subject of several variables, including the length of the wire, the diameter of the axle around which the wire must be wrapped and the relative radial position at which the respective ends of the wire are mounted on the opposing faces of the free and driven brushes.

As used herein, the term wire will be understood to include braided stainless steel wire, braided nylon, nylon monofilament, cording formed of aromatic polyamide fibers, and other man-made and natural fibers and materials that are able to be repeatedly wound and unwound while resisting bending fatigue and/or work hardening and undue stretching under tension.

In another preferred embodiment, a variably expandable member is positioned between a housing on the driven brush and a corresponding housing on the free brush and a pressurized fluid is gradually added to the expandable member when the direction of rotation of the driven brush is reversed so that there is a predetermined period of differential movement between the free brush and the driven brush. When

the drive motor is stopped prior to reversing its direction, the pressurized fluid is discharged from the inflatable member which retracts or deflates from its position of engagement with the housing member of the free brush. In this embodiment, a pressurized stream of water from the pool can conveniently be introduced into the expandable member, e.g., a polymeric bladder that gradually expands radially and/or axially in the direction of the housing mounted on the opposing end of the free brush. When the motor stops, the bladder is depressurized and the fluid is discharged, thereby disengaging the free brush.

In a further embodiment, the opposing end faces of the driven and free brushes are provided with an orbital gear system, the size and number of gear teeth on the respective central and orbital gear members being predetermined to provide disengagement of the free brush in order to effect the desired degree of turning of the pool cleaner.

An electro-magnetic clutch can also be utilized where the activation of the engagement of the clutch plates is programmed into the processor. In the embodiment utilizing an electro-magnetic mechanism, the driven brushes operate independently of the free brushes for a predetermined amount of time to complete the turning of the body and then the electro-magnetic clutch is powered to cause the free brushes to move synchronously with the driven brushes. The program controller disengages the electro-magnetic clutch at the same time that the drive motor stops; thereafter the timer is initiated when the drive motor was started in the opposite direction and the process steps are repeated.

As will be apparent to one of ordinary skill in the art, other methods and apparatus can be utilized to effect the differential movement between the driven and free brushes based upon a timed interval or predetermine amount of angular rotation in order to effect the desired change in direction of the pool cleaner following
5 stopping and reversing of the drive motor. For example, a solenoid can be activated to urge an axially displaceable clutch plate on either of the driven or free brushes into mating engagement with the opposing clutch plate. Any of a number of other electromechanical constructions can be utilized in order to achieve the desired result.

It is to be understood that the pump motor which provides a force vector in
10 the direction of the surface on which the pool cleaner is moving runs continuously throughout the operation of the pool cleaner in accordance with the method of the invention. This downward thrust maintains the pool cleaner in contact with the surface at all times. This is an improvement over prior art methods in which the pump motor is stopped or its rotational speed greatly decreased to reduce the
15 frictional forces between the brushes and the pool surface during turning maneuvers. In accordance with the present invention, by stopping brushes on one side of the cleaner while rotating the adjacent brushes on the opposite side of the cleaner provides sufficient traction to cause the unit to turn into the new desired directions of travel before synchronizing the movement of the adjacent brushes.

20 **Directional Control Program**

In a further aspect, the invention also contemplates a novel program and system for controlling the movement of the pool cleaner in a highly efficient repetitive

pattern that will cause the pool cleaner to pass over substantially the entire surface of the pool or tank that is to be cleaned, regardless of it's external configuration, e.g., rectilinear, curvilinear or a combination of the two. The directional control program is adapted to cleaning only the bottom surface of a pool or tank, as well as efficiently
5 controlling the movement of a pool cleaner in the cleaning both the bottom and the side walls of the pool.

In one preferred embodiment, the programmed directional movement of the pool cleaner is along a first longer leg for a predetermined period of time; the drive motor stops and the direction is reversed; the driven brushes at either end of the pool
10 cleaner turn at a greater rotational velocity than the free brushes for a predetermined number of revolutions to thereby cause the cleaner body to turn; the free brushes are then engaged for synchronous movement with the respective adjacent driven brushes and the pool cleaner advances along a second leg for a shorter period of time at the end of which the drive motor stops and reverses direction; the above steps are
15 repeated for a predetermined number of cycles after which the power to the drive motor continues uninterrupted for a time that is approximately twice the time allotted for the longer leg; after the extended running time, the drive motor is stopped and its direction reversed; the original steps are repeated for the same predetermined number of cycles as above.

20 In programming the processor, the times allotted for the pool cleaner to traverse the relatively longer and shorter legs is determined with reference to the speed of the motor, the diameter/circumference of the brushes and the size of the pool or tank in which the cleaner is to operate. For example, a high speed drive motor

can produce a speed of about 60 feet per minute in a belt-driven pool cleaner while a conventional (lower) speed motor will produce a cleaner speed of about 30 feet per minute across the bottom surface of the pool.

In one preferred embodiment, the shorter leg of travel is sufficient to cause
5 the pool cleaner to traverse a distance that exceeds half of the bottom width of the pool. In the case of a pool cleaner equipped with a conventional, or low speed motor, the length of time allotted for a complete cycle is one minute with the longer leg being allotted 36 seconds and the shorter leg 24 seconds. In this embodiment, after thirty such cycles, the order of long and short legs is reversed. In this mode of
10 operation the pool cleaner moves from one side of the pool via a zia-zag path until it reaches the other side of the pool. When this occurs, the relative direction of the cleaning pattern will be reversed, i.e., if the pool cleaner was moving in a counter-clockwise direction around the periphery of the pool for the previous thirty cycles, after the cleaner has crossed the pool and reaches the opposite water line, the next
15 thirty cycles will be in a clockwise direction with respect to the periphery of the pool.

In this mode of operation, it has been found that a pool cleaner employing the method and apparatus of the invention, equipped with a high speed motor and a resultant angular change in direction of about 15° to 60° , when operated in a large, residential swimming pool of a irregular curvilinear configuration traversed the
20 perimeter approximately 3 1/2 times in one hour.

Optional Battery Operation

This highly efficient mode of operation of the pool cleaner with a single drive motor in combination with a highly efficient cleaning pattern, enables the unit to be powered by a on-board rechargeable battery. A further advantage of the apparatus and method of the invention is that it obviates the need to have the pool cleaner move horizontally along the waterline of the pool in order to assume a new direction of movement once the drive motor is reversed. The elimination of the floating power cable from the pool cleaner renders it even more efficient and eliminates any possibility that the program will be interrupted by the forces applied to the nearly neutral buoyant pool cleaner and also the risk that the power cable will interfere with the movement of the brushes when the unit is operating at the waterline.

Use of Mercury Switch

In yet a further preferred embodiment of the invention, the processor and controller circuit includes a mercury switch that is activated when the pool cleaner body moves from a generally horizontal position to an elevation of about 70° or more at either end. The signal initiates a timed-operational period after which the drive motor is stopped and reversed. Thus, as the pool cleaner approaches a side wall and moves from a generally horizontal to a generally vertical orientation, the movement of the mercury switch completes a circuit that produces a signal received by the processor that activates a time clock circuit. After a predetermined period of time, which can be, e.g., eight seconds to twenty seconds, the drive motor is stopped and its direction reversed. The predetermined time interval following receipt of the signal

from the mercury switch can be sufficient to insure that the pool cleaner will reach the water line of the pool before the motor reverses direction.

In this embodiment, the shorter leg of travel is preferably sufficient to cause the pool cleaner to traverse approximately one-half of the width of the pool during each cycle; the longer leg of travel need not be predetermined in the operating
5 program, since the pool cleaner will eventually generate a signal via the mercury switch as the unit begins its ascent of a wall.

As in the prior preferred embodiment, the processor can preferably be programmed to operate in a cyclic mode with a periodic change in direction of
10 movement from counter-clockwise to clockwise and vice versa.

In the embodiment in which two motors are employed to drive each of the co-axially mounted but independent pair of brushes, the program of the processor can include the step of reversing the direction of rotation after a predetermined number of cycles. This will allow the pool cleaner to change from a clockwise pattern of
15 movement with respect to the periphery of the swimming pool to a counterclockwise pattern without the requirement that the pool cleaner completely traverse the bottom and, if appropriate opposite side wall of the pool as was described in the single drive motor embodiments described above.

When the pool cleaner reaches the waterline, the longitudinal axis of the pool
20 cleaner will generally become oriented in a direction that is normal to the waterline before the timed stopping and reversal of the drive motor. In this configuration, the unit makes the angular turn when the drive motor causes the rotation of one of each pair of the fore and aft brushes that are positioned on the same side of the cleaner

housing. In the event that the pool cleaner has approached the waterline at a relatively small acute angle and the timed operation from the generation of the mercury switch signal is insufficient to permit the unit to assume a generally vertical position on the side wall, the pool cleaner will, nevertheless return to the bottom
5 along a different path from the waterline. Moreover, a pool cleaner constructed and operating in accordance with the improved programmed control method of the invention will not be adversely effected with respect to its ability to cover the surfaces to be cleaned during the time allotted for completing the cleaning of the pool.

Two Drive Motor Alternative Embodiment

10 Although the preferred embodiments of the invention as described above operate most efficiently with a single drive motor with a delayed starting of one of a pair of co-axial adjacent brushes using mechanical means to effect the delay, followed by synchronous rotation of the brushes, this highly efficient cleaning pattern can also be accomplished utilizing a second drive motor. In the embodiment utilizing
15 two drive motors, no clutch or other delayed linking mechanism is required. Each one of the pair of fore and aft brushes turns separately in response to the action of the independent drive motors. The processor is programmed to operate one of the drive motors in the manner that was described above in the embodiments with a free brush. The predetermined delay in starting the rotation of the adjacent brush is
20 entered into the processor program so that the same end result is achieved in terms of patterned movement, but without the mechanical linkage between the adjacent brushes at either end of the pool cleaner body.

As will be apparent to one of ordinary skill in the art, the use of a second drive motor increases the cost of materials and labor in assembling the pool cleaner, adds to its weight, as well as increasing the operating and maintenance expense. The addition of the second drive motor may also render it impractical to utilize a self-contained battery mounted in the pool cleaner body, since the power drain will be substantially increased.

Referring now to Fig. 1, there is shown a pool cleaner 100 having a housing 102 with an outlet 104 in the upper portion of the housing for the discharge of water from the filter pump in order to urge the cleaner brushes into contact with the surfaces to be traversed. At each end of the housing, a pair of brushes 12, 14 are coaxially mounted for rotation. A single drive motor 110 is shaft mounted to drive pulley 112 that engages drive belt 114. Handle 101 is provided near the top of the housing 102.

The outboard end of brush 12 is fitted with a drive pulley 120 on which drive belt 114 is positioned. Henceforth, brush 12 will be referred to as a "driven brush".

The adjacent brush 14 is mounted on common axle 16, is separate from driven brush 12 and is freely rotatable, within limits that will be described in more detail below. Henceforth, brush 14 will be referred to as a "free brush" in describing the apparatus and method of the invention.

To further facilitate the description and understanding of the invention, driven brush 12 is shown shaded in the figures to differentiate it from free brush 14.

With continuing reference to the embodiment illustrated in Fig. 1, a delay clutch means 30 is positioned between brushes 12 and 14 and co-axially mounted on axle 16.

Referring now to Fig. 2, driven clutch plate 32 with axial opening 40 is
5 securely mounted to the interior end of driven brush 12. In the embodiment illustrated, the driven clutch plate 32 has an annular recess 34 into which projects engagement member 36. A set screw 38 is also provided for further adjustment as will be explained below. Opposing clutch plate 62 is securely affixed to the inboard end of free brush 14 and its interior face is configured similarly to plate 32.

10 As further illustrated in this embodiment, a pair of intermediate clutch members 42 and 52 having projecting engagement members 44 and 54, respectively, are mounted between plates 32 and 62. When the driven clutch plate 32 has proceeded through a sufficient number of revolutions, the projecting members 36, and the engagement members 44, 54 are all in contact and the free brush moves
15 synchronously. Upon reversal, the free brush remains motionless until the intermediate clutch members have rotated sufficiently to bring the engagement members back into contact with the projecting members. In this embodiment, the driven wheel will turn almost three complete revolutions before the free brush begins to move synchronously.

20 Referring now to Fig. 3, there is shown a cross-sectional view depicting the mating arrangement of the fixed clutch plates and rotating intermediate clutch members 42 and 52. As clearly shown, all of the elements are mounted for rotation on axle 16.

The cross-sectional view of Fig. 4 shows the relationship of the projecting member 36 on clutch plate 32 in contact with engagement members 44 and 54. It can also be seen from this cross-sectional view that set screw 38 in the periphery of plate 32 can be lowered to secure intermediate clutch member 42 in position against
5 projecting member 36.

An alternative preferred embodiment of an adjustable delayed drive clutch plate assembly is schematically illustrated in the exploded view of Fig. 5. In the embodiment illustrated, the opposing clutch plates 72 and 92 are provided with a plurality of moveable adjustable projecting members 74 and 94 respectively. The
10 intermediate clutch members 82 and 84 are provided with engagement members 83 and 85, respectively, that are positioned to engage radially projecting contact members 76 and 96. As in the embodiment described above, the clutch assembly is co-axially mounted on axle 16 which is also supporting brushes 12 and 14.

This embodiment of the delay drive clutch assembly permits adjustment to be
15 made to the number of independent rotations by the driven brush before engagement and synchronous operation of the free brush simply by moving one or more of the projecting members 74, 94 on either or both of the end clutch plates 72, 92 radially inward into the central space to contact the engagement members 83 and/or 85 in less than a full revolution. As previously explained, this type of adjustability can be
20 utilized to specifically adapt the number of degrees, or arc that the pool cleaner turns when the drive motor reverses direction.

As will be understood by one of ordinary skill in the art, other structures and configurations can be employed to adjust the number of rotations, or partial rotations.

For example, sliding engagement pins (not shown) can be mounted in one or both of the end clutch plates 72, 92 for movement in the axial direction to contact fixed engagement members 83, 85.

Referring to Fig. 6, there is schematically illustrated a delayed drive
5 mechanism employing a flexible wire 56 extending between plates 52 and 54 that are attached respectively to driven brush assembly 12 and free brush assembly 14. In accordance with this embodiment, movement of the driven brush 12 and associated plate 52 will result in wire 56 being spirally wound around axle 16 on which free brush assembly 14 is supported for free rotation after the driven brush 12 has
10 completed a sufficient angular movement.

As shown in Fig. 7, the axle 16 can be provided with a housing 60 of a larger diameter that will require fewer wraps of wire 56 in order to remove all slack and cause free brush 14 to move synchronously with brush 12. The change in the location of the points of attachment 58 and 59 of the opposing ends of wire 56 will
15 also serve to change the number of revolutions or angular displacement experienced by the plate 54 and associated free brush when the slack in the wire is being taken up. It will also be understood that the number of turns required to unwrap the wire from either axle 16 or spool 60 of Fig. 7 will be one-half of the total number of revolutions required before free brush 14 begins to move synchronously with driven
20 brush 12.

It will also be understood from the schematic illustrations of Figs. 6, and 7 that the plates 52, 54 can be positioned relatively much closer together and that they can be assembled in a protective housing 62. Alternatively, the plates 52 and 54 can

be provided with an annular opening or with a rim so that they are mounted in very close proximity to enclose the wire. the turning of the pool cleaner at each occasion that the direction is reversed.

Referring now to Fig. 8 there is schematically illustrated a controlled pattern
5 of movement of a pool cleaner 100 operating in a large, generally circular tank or pool 101, having a perimeter 102. The pool cleaner 100 has fore and aft driven brushes 12 and co-axially mounted free brushes 14. In the mode of operation illustrated, the pool cleaner 100 approaches and contacts the side wall at a first position 102A; the direction of rotation of the drive motor and thereby, driven
10 brushes are reversed and operate for a number of rotations sufficiently to turn the cleaner at an angle in the range of from 15° to 60° and then with synchronous operation of the free brushes 14, to move along a shorter leg (S), after which the unit stops and reverses direction to move along a longer leg (L) to the second position 102B at the periphery of the pool 100.

15 This pattern of movement continues along alternating long and short legs (L,S) until the predetermined number of cycles have been completed at contact point 102C. Thereafter, the order of the movement along the long and short legs is reversed which causes the cleaner 10 to move in towards the center of the pool 100 so that the pool cleaner does not return to contact the side wall from which it departed. As will be
20 seen from the schematic illustration of Fig. 8, the pool cleaner continues in accordance with the programmed directional control until it reaches a position 102E on the opposite side wall. As the program is reversed, the pattern of movement of

the pool cleaner 100 with respect to the periphery 102 of pool 101 changes from counter-clockwise to clockwise.


Referring now to Fig. 9A, there is schematically illustrated the controlled directional movement of a pool cleaner 100 in accordance with one preferred method of operation of the invention. The pool cleaner 100 initially moves up to and away from the side wall of the irregularly shaped pool 101 for a pre-determined number of cycles. In accordance with the illustration of Fig. 9B, at the end of the first number of cycles at point 102A on the side of the pool, an extra long leg L' permits the pool cleaner to cross the entire bottom surface of the pool and ascend the opposite wall at 102E. Thereafter, the pool cleaner resumes its programmed cleaning by operation to run the pre-determined long and short legs, but during this cycle moving in a clockwise direction.

A further mode of operation will be described with reference to Figs. 10A and 10B where there is schematically illustrated controlled directional movement of pool cleaner 100 that is equipped with a mercury switch that generates a signal when the orientation of the pool cleaner body moves from horizontal to a pre-determined angle of about 70°. As the pool cleaner 100 moves up on the wall the mercury switch signal is received by the processor and a time clock provides a delay of, e.g., eight seconds before the drive motor is stopped and reversed. The processor timer then allows the pool cleaner to go past the middle of the pool before it reverses the direction of the drive motor. Thus the pool cleaner is running on a program, which is based on alternating mercury switch and time control. The long leg (M) is controlled by a mercury switch, while the short leg (T) is controlled by a timer.

This cycle is repeated a pre-determined number of times after which as the pool cleaner descends the wall and goes past the middle of the pool, it does not reverse when time control changes to mercury switch control, but continues to move across the pool and resumes its program, but moving in a clockwise direction.

5 From the above description, it will be seen that the method and apparatus of the invention of controlling the movement of the pool cleaner is accomplished without resorting to a complicated algorithm embedded in the processor that must be executed by the controller. The relative simplicity of the means for controlling the movement of the cleaner permits the apparatus to be adjusted for the particular conditions of the
10 tank of pool to be cleaned.

FIG. 1

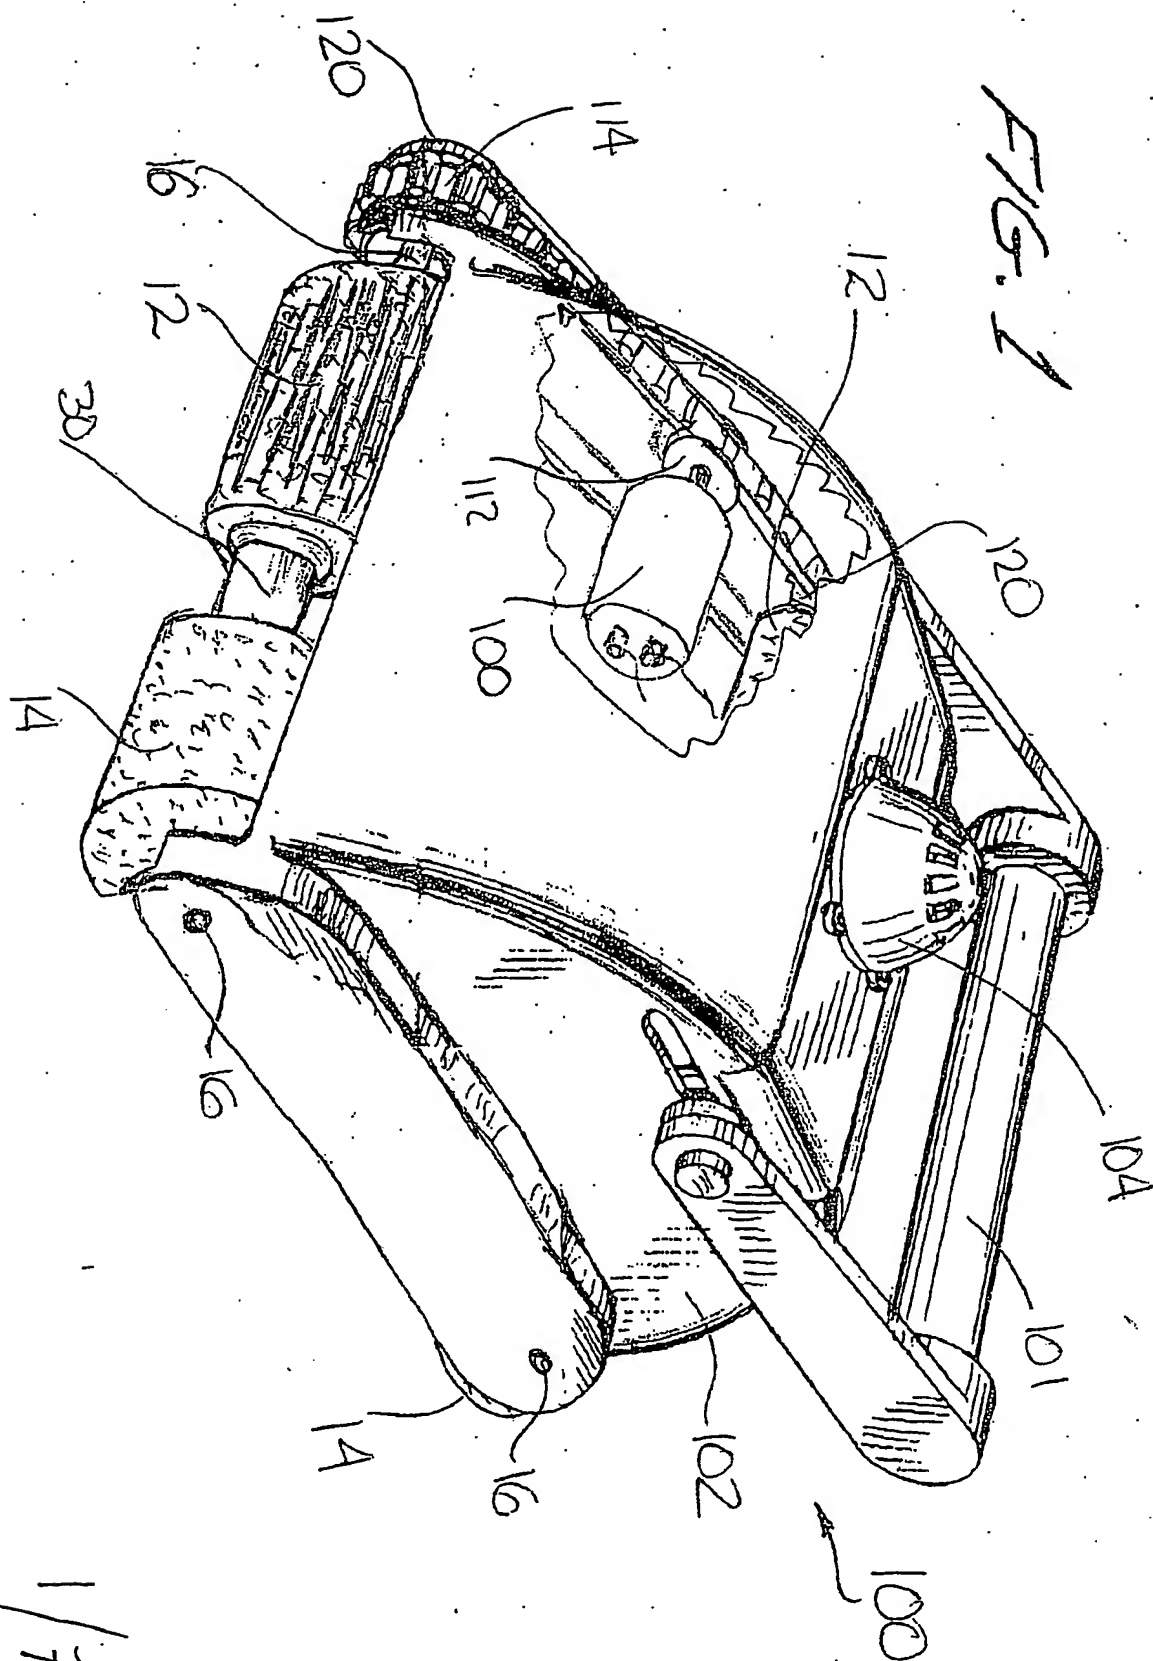

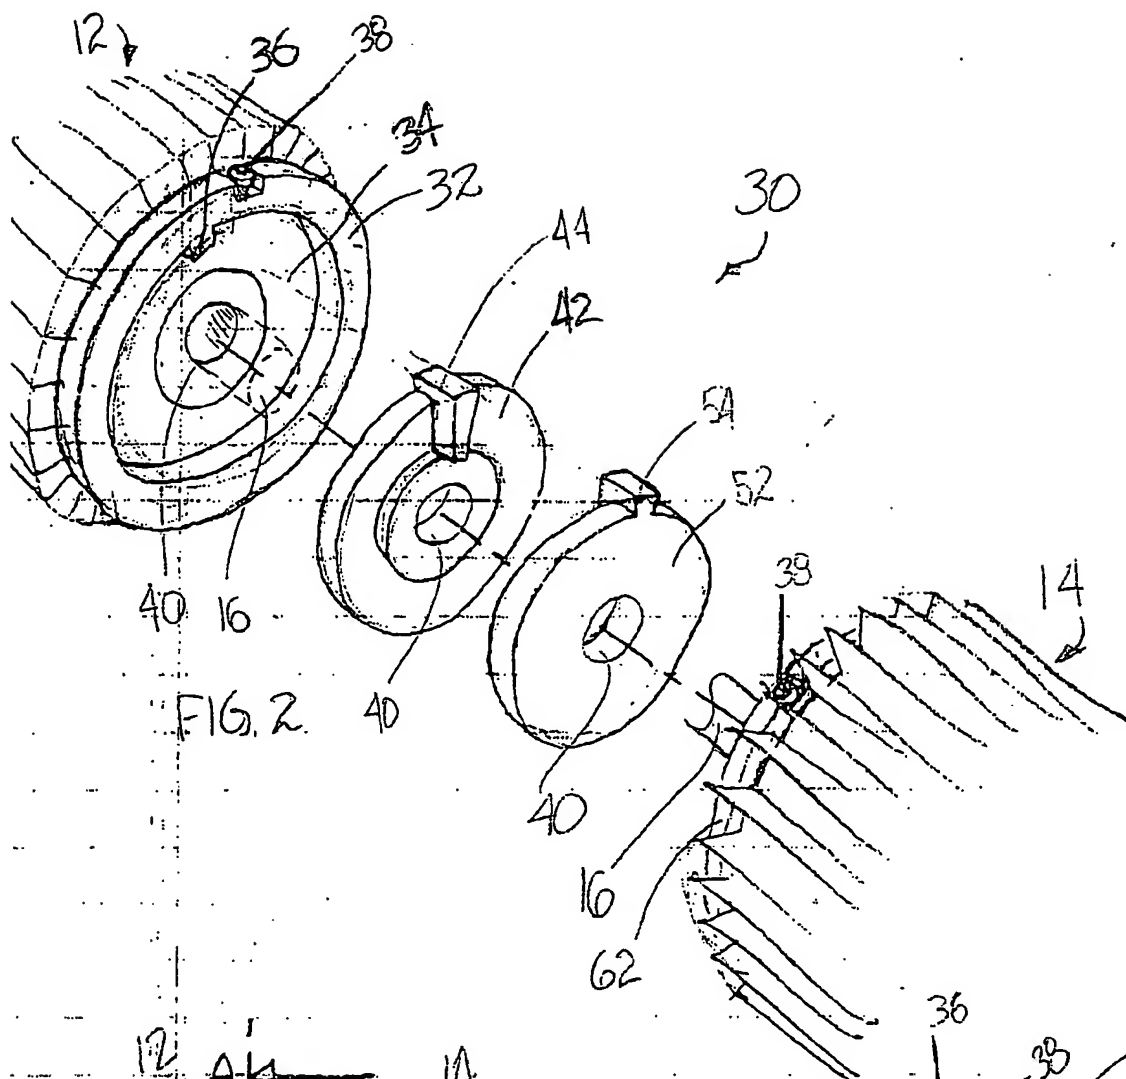


FIG. 2


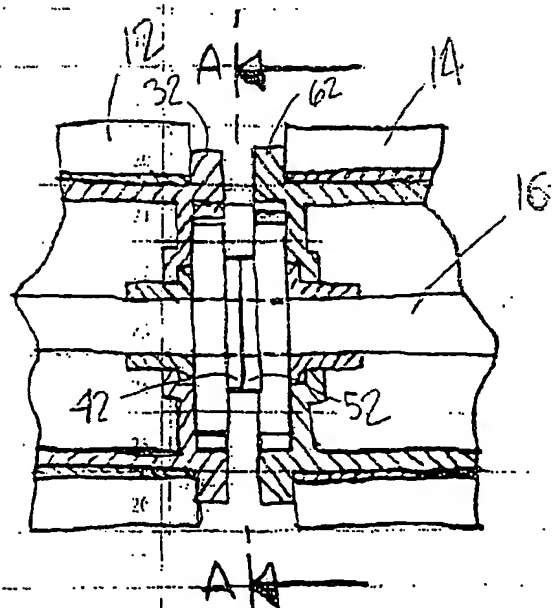


FIG 3

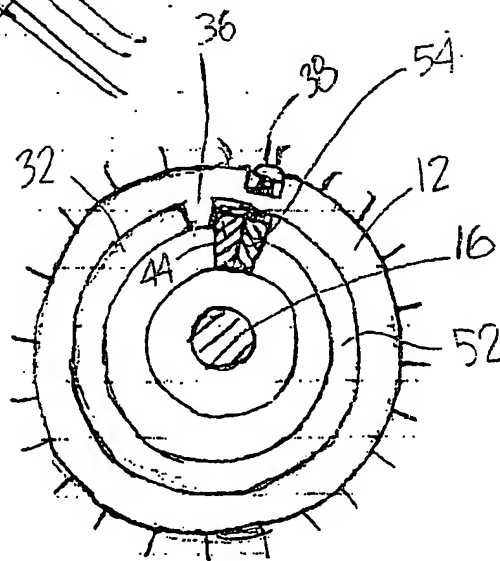

SECTION A-A
FIG 4

7/2

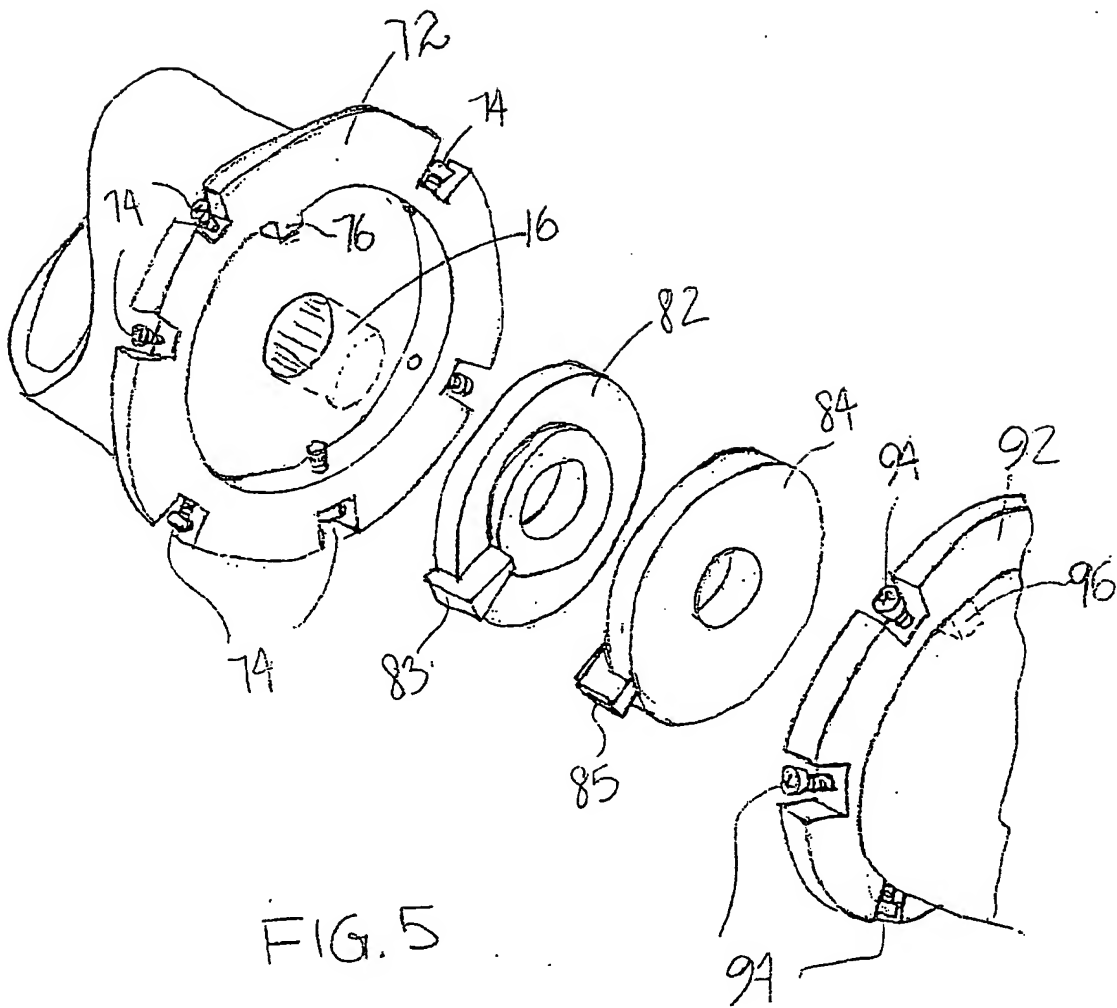


FIG. 5

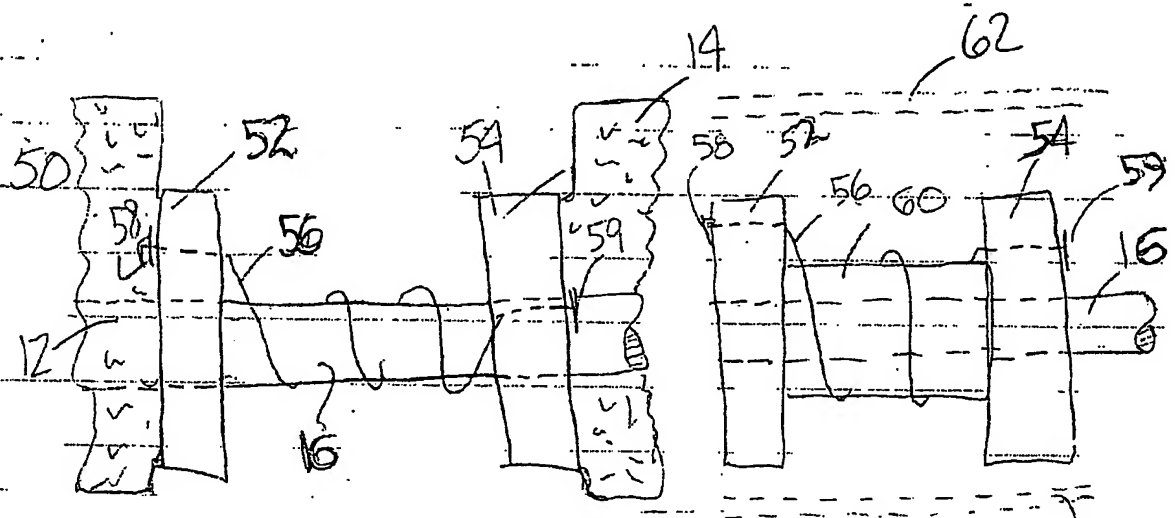


FIG. 6

FIG. 7

4/7





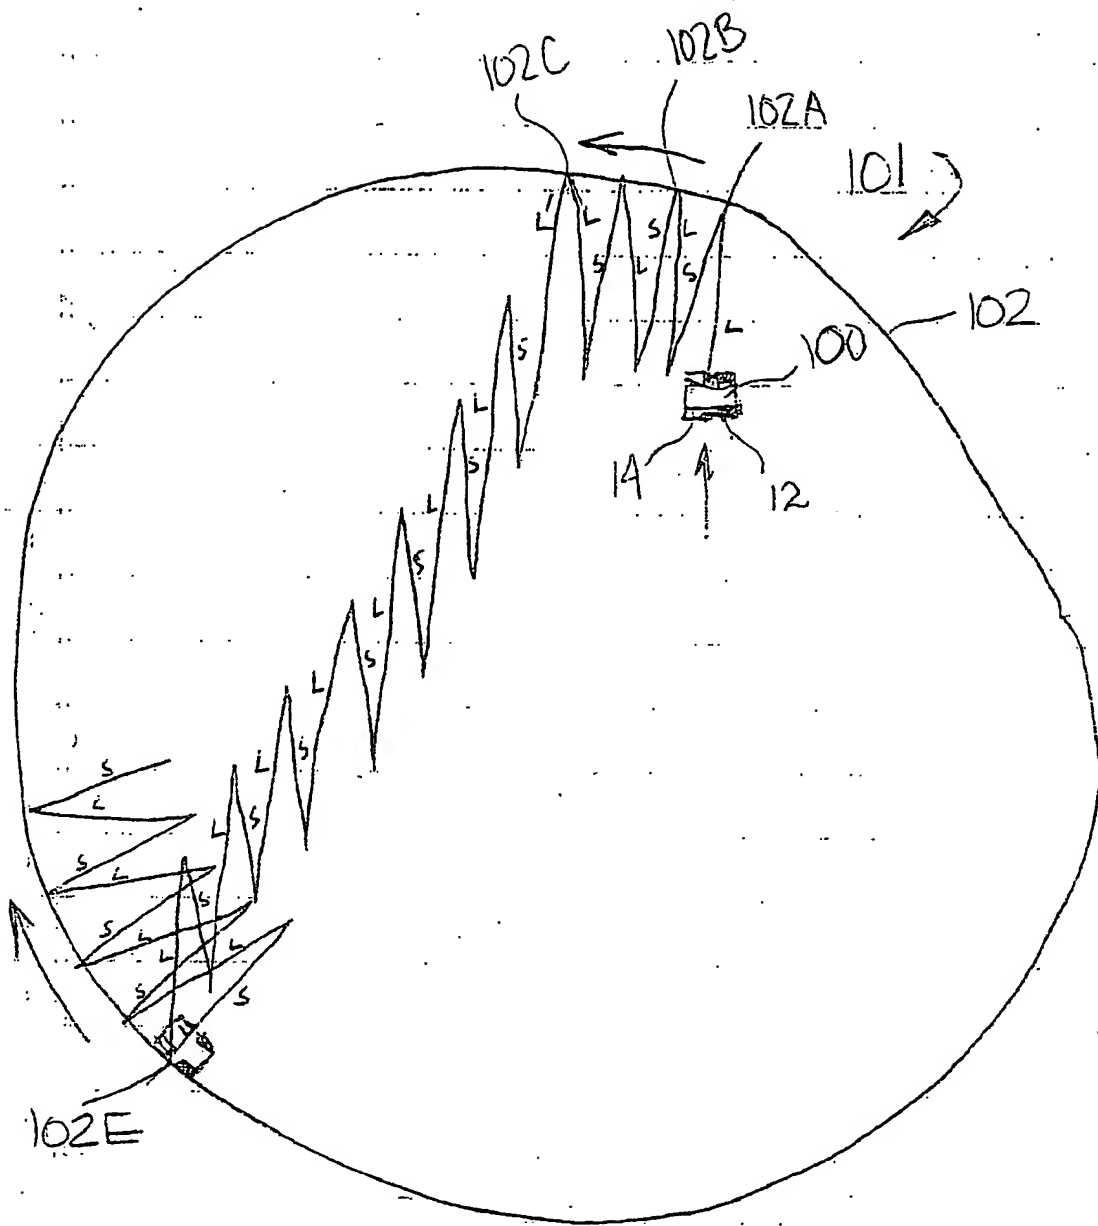


FIG. 8

5/7

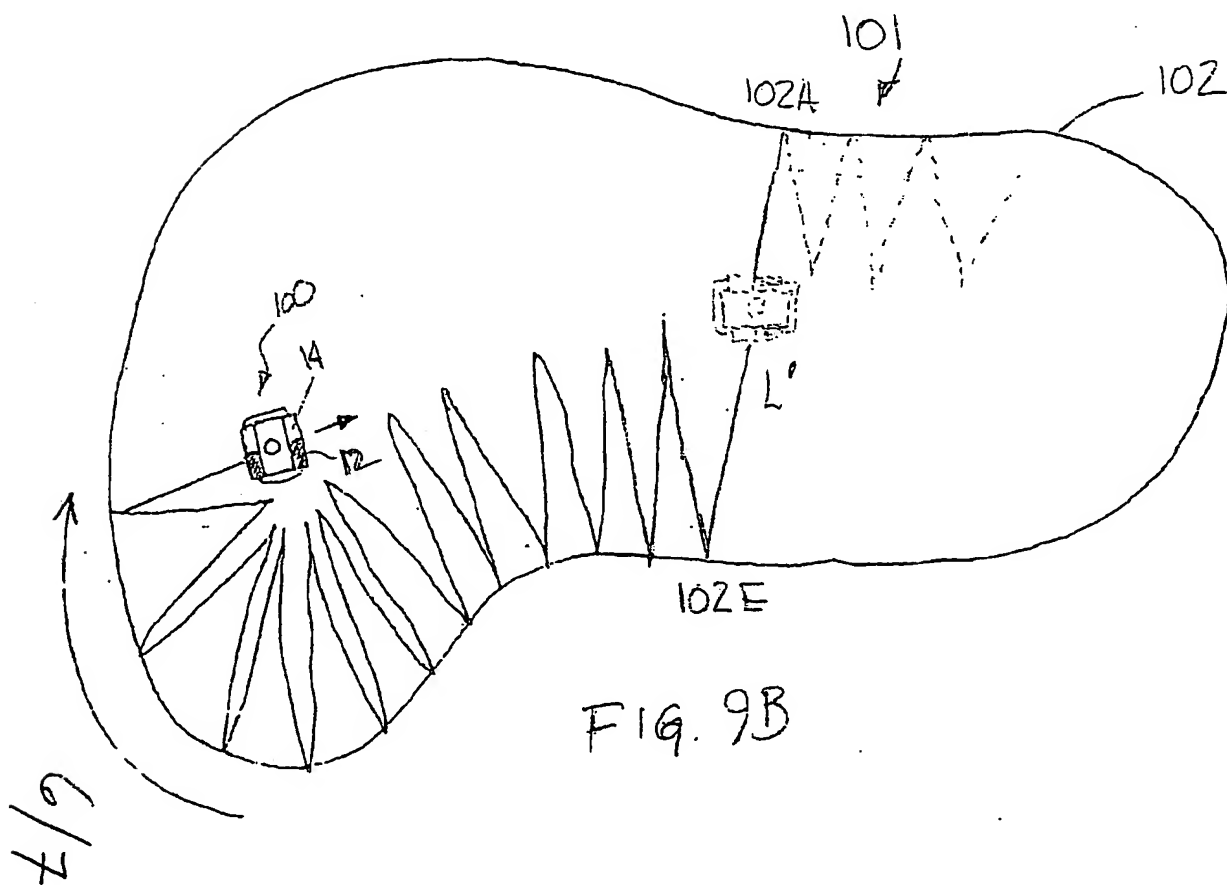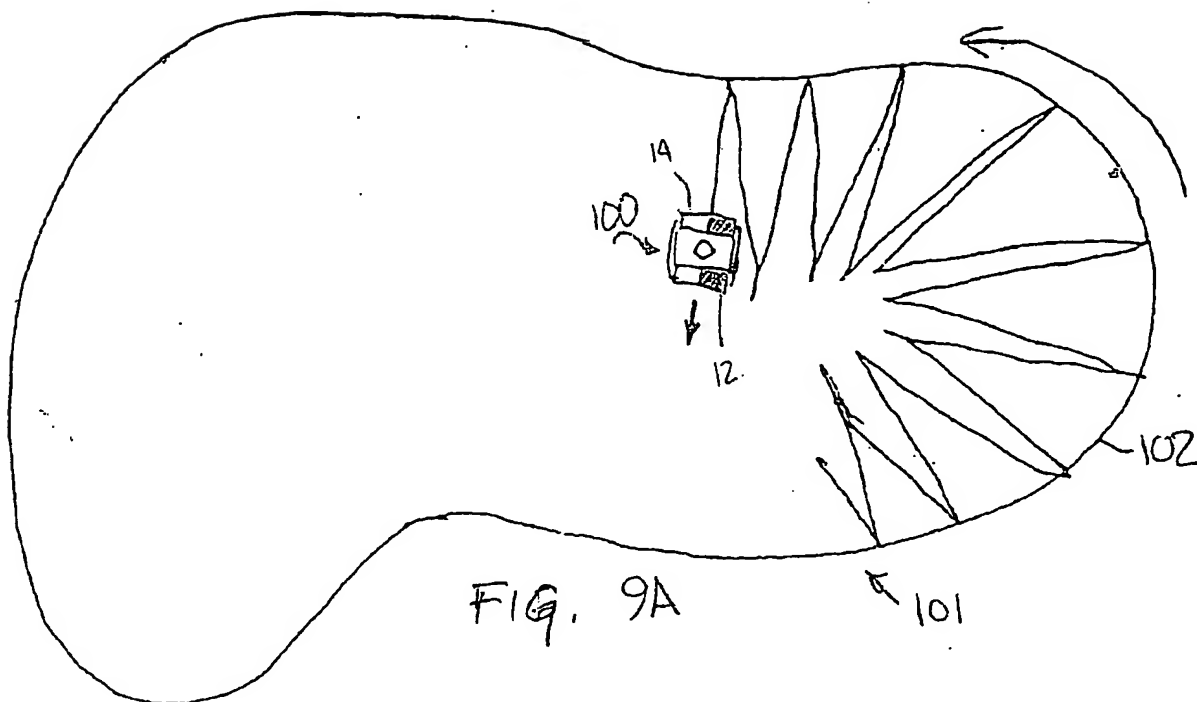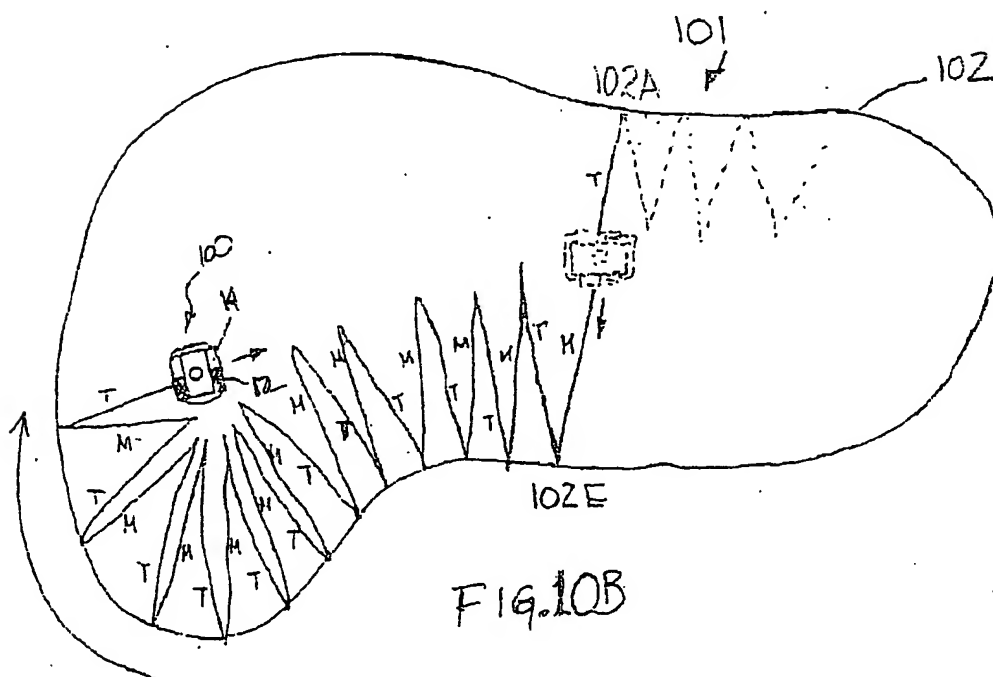

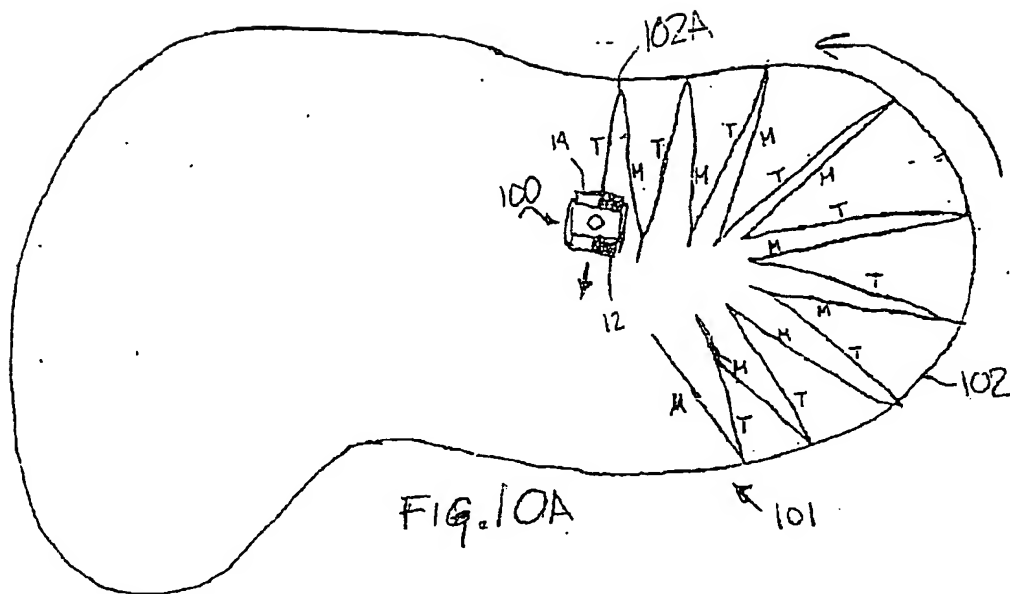

7/7

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/US04/037148

International filing date: 04 November 2004 (04.11.2004)

Document type: Certified copy of priority document

Document details: Country/Office: US
Number: 60/517,352
Filing date: 04 November 2003 (04.11.2003)

Date of receipt at the International Bureau: 23 December 2004 (23.12.2004)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.